


HERO-FIRE A60

Article	Mono glass	Insulated glass
	HERO-FIRE A60 mono	HERO-FIRE A60 double glazing
Thickness in mm	≥ 28	≥ 44
Light transmission T_L in %	≤ 87	≤ 73
Solar factor g in %	≤ 69	≤ 56
Weight in kg/m ²	≥ 46	≥ 56
R _w -Value in dB	≥ 44 (-1,-3)	≥ 44
U _G -Value in W/m ² K	4,7	1,0-3,0
Fire resistant doors	Yes	-
Interior design	Yes	Yes
Facade	-	-
Overhead glazing	-	-
Balldroptest DIN 52338	-	-
Protection against ballthrow DIN 18032	Yes	Yes
Pendulum body impact resistance DIN EN 12600	Yes	Yes
Bending strength DIN EN 12150	Yes	Yes
Breakage structure DIN EN 12150	Yes	Yes
Test according to DIN 18008	-	-
Report number	GV10/7514.1 GL-18 873-11 HH	AS-10-11-GV 10/7514.1 GL-18873-11 HH

mono-construction for indoor use

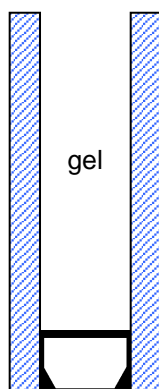

double glazing-construction for outdoor use

